


Two VLANs on the core switch are interconnected

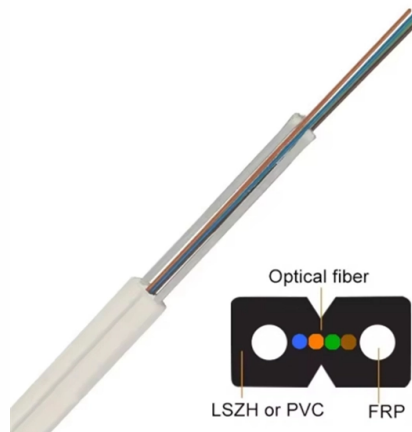

Overview

Configure Inter-VLAN Routing with Catalyst Switches This document describes how to configure Inter VLAN routing with Cisco Catalyst series switches. Solved.

Key Takeaways

Two VLANs on a core switch can communicate through inter-VLAN routing using either Switched Virtual Interfaces (SVIs) or a router-on-a-stick configuration. Understanding Inter-VLAN Routing

By default, devices in separate VLANs cannot communicate because each VLAN is a distinct broadcast domain. Inter-VLAN routing allows traffic to flow between VLANs by using a Layer 3 device, such as a router or a Layer 3 switch, which routes packets between the VLAN subnets . Each VLAN must have its own IP subnet, and the Layer 3 device acts as the default gateway for devices in that VLAN .

Configuration Options

- Switched Virtual Interfaces (SVIs) on a Layer 3 Switch
- Create a VLAN interface for each VLAN: interface vlan
- Assign an IP address and subnet mask: ip address
- Enable the interface: no shutdown
- Enable IP routing on the switch: ip routing

- Connect access ports to the appropriate VLANs and configure trunk ports for inter-switch links using 802.1Q tagging .
- This method allows routing at wire speed and is scalable for medium to large networks .
- Router-on-a-Stick (ROAS)
- Use a single physical router interface divided into subinterfaces, one per VLAN.
- Assign each subinterface an IP address corresponding to the VLAN subnet.
- Configure the switch port connected to the router as a trunk to carry all VLAN traffic.
- This method is suitable for small to medium networks but can become limited as VLAN count increases .

Key Considerations

- Trunk Ports: Ensure that the link between switches or between switch and router is configured as a trunk (switchport mode trunk) and allows all necessary VLANs (switchport trunk allowed vlan), .
- Native VLAN: Avoid using VLAN 1 as the native VLAN on trunks; choose an unused VLAN to prevent traffic leakage and security issues .
- Routing Table: Once SVIs or router subinterfaces are configured, verify that the routing table contains connected routes for each VLAN subnet (show ip route) to ensure proper inter-VLAN communication .
- Redundancy: For high availability, consider HSRP or VRRP on Layer 3 switches to prevent a single point of failure .

Troubleshooting Tips

- Verify VLAN membership on each switch port (show vlan) and ensure the correct ports are assigned.
- Check trunk status and allowed VLANs (show interface trunk) to confirm VLAN traffic is passing.
- Ensure IP addresses and subnet masks are correctly configured on SVIs or router subinterfaces.
- Test connectivity using ping between devices in different VLANs to confirm routing is operational . By following these steps, two VLANs on a core switch can be successfully interconnected, allowing devices in separate VLANs to communicate securely and efficiently.

Article Content

Solved: interconnecting two core switches

Solved: Hi all, I need to connect two Cisco C4500X, using a 1000BaseLH transceiver. Each core switch manage its

Routing Between VLANs Overview [Networking Software (IOS & NX

The Inter-Switch Link (ISL) protocol is used to interconnect two VLAN-capable Ethernet, Fast Ethernet, or Gigabit Ethernet devices,

Related Video Reference

This video was associated with the source search result. Verify technical details against current product documentation and project requirements.

Contact Us

Continue your research online:

Website: <https://danielonso.es>

Technical inquiry: <https://danielonso.es/contact.html>

This document is for preliminary research. Verify specifications against current standards, product documentation and project requirements.

